


# ASLH400/5

ASLH400/5

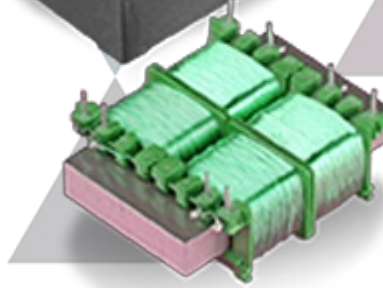

## Vakum altında kurumali vernik ile sessiz çalışma

Nominal Gerilim: 230-1000V

Nominal Güç: 0,50 - 60kVar

Nominal Frekans 50Hz.

Ortam Sıcaklığı: 40°C

Sarım: Bakır, Alüminyum

Baglanti Tipi: Klemens, Papuç ve Alüminyum Bara

Isi Kontrol Termigi: 130°C

Sandartlar: EN-61558-2-20 ve EN-61558-1 ayrıca CE direktiflerine uygun üretim ISO 9001 Kalite Yönetim Sistemi

## Quiet operation on with oven-drying varnish under vacuum

Nominal Voltage 230-1000V  
 Nominal Power: 0,50 - 60kVAr  
 Nominal Frequency: 50 Hz.  
 Ambient Temperature: 40 °C  
 Winding: Copper,Aluminum  
 Connenection on Type: Terminal,Cable Shoe Copper or Aluminum Busbar  
 Heat Control Termal: 130 °C  
 Standards: EN-61558-2-20 and EN-61558-1  
 also CE production on according to directives ves  
 ISO 9001 Quality Management System

Reaktör Faktörü Reactor Factor	Rezonans Frekansi 50 Hz. İçin Resonance Frequency for 50 Hz.
5,67%	210 Hz
7%	189 Hz
14%	134 Hz

SIPARIS KODU / Order No.	GÜÇ / Power / kvar	L / mH	I rms / A	a / mm	b / mm	c / mm	Agirlik / Weight / kg
ASLH400/5/100	1	30,61	1,80	120	110	75	2
ASLH400/5/156	1,56	19,62	2,81	150	135	80	3
ASLH400/5/250	2,5	12,24	4,51	150	135	85	3,5
ASLH400/5/312	3,12	9,81	5,63	180	175	100	5
ASLH400/5/500	5	6,12	9,02	180	175	105	6
ASLH400/5/625	6,25	4,90	11,28	180	175	110	6
ASLH400/5/750	7,5	4,08	13,53	180	175	120	8
ASLH400/5/1000	10	3,06	18,04	180	175	125	9
ASLH400/5/1250	12,5	2,45	22,55	180	175	130	9,5
ASLH400/5/1500	15	2,04	27,06	240	200	140	14,5

<b>ASLH400/5/2000</b>	<b>20</b>	<b>1,53</b>	<b>36,08</b>	<b>240</b>	<b>200</b>	<b>150</b>	<b>17</b>
<b>ASLH400/5/2500</b>	<b>25</b>	<b>1,22</b>	<b>45,11</b>	<b>240</b>	<b>200</b>	<b>160</b>	<b>17</b>
<b>ASLH400/5/3000</b>	<b>30</b>	<b>1,02</b>	<b>54,13</b>	<b>240</b>	<b>200</b>	<b>170</b>	<b>18</b>
<b>ASLH400/5/4000</b>	<b>40</b>	<b>0,76</b>	<b>72,17</b>	<b>300</b>	<b>260</b>	<b>140</b>	<b>24</b>
<b>ASLH400/5/5000</b>	<b>50</b>	<b>0,61</b>	<b>90,21</b>	<b>300</b>	<b>260</b>	<b>150</b>	<b>30</b>

\* Özel İstek Üzerine üretim yapılmaktadır. Production can be made according to your request.