


ASLH400/5

ASLH400/5

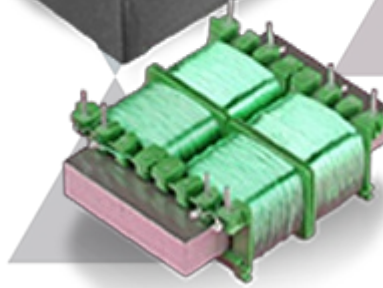

Vakum altında kurumali vernik ile sessiz çalışma

Nominal Gerilim: 230-1000V

Nominal Güç: 0,50 - 60kVar

Nominal Frekans 50Hz.

Ortam Sıcaklığı: 40°C

Sarım: Bakır, Alüminyum

Baglanti Tipi: Klemens, Papuç ve Alüminyum Bara

Isi Kontrol Termigi: 130°C

Sandartlar: EN-61558-2-20 ve EN-61558-1 ayrıca CE direktiflerine uygun üretim ISO 9001 Kalite Yönetim Sistemi

Quiet operation on with oven-drying varnish under vacuum

Nominal Voltage 230-1000V
 Nominal Power: 0,50 - 60kVAr
 Nominal Frequency: 50 Hz.
 Ambient Temperature: 40 °C
 Winding: Copper,Aluminum
 Connenection on Type: Terminal,Cable Shoe Copper or Aluminum Busbar
 Heat Control Termal: 130 °C
 Standards: EN-61558-2-20 and EN-61558-1
 also CE production on according to directives ves
 ISO 9001 Quality Management System

Reaktör Faktörü Reactor Factor	Rezonans Frekansi 50 Hz. İçin Resonance Frequency for 50 Hz.
5,67%	210 Hz
7%	189 Hz
14%	134 Hz

SIPARIS KODU / Order No.	GÜÇ / Power / kvar	L / mH	I rms / A	a / mm	b / mm	c / mm	Agirlik / Weight / kg
ASLH400/5/100	1	82,91	1,53	150	135	85	4
ASLH400/5/156	1,56	53,15	2,39	150	135	95	4,5
ASLH400/5/200	2,5	33,16	3,82	150	135	95	5
ASLH400/5/312	3,12	26,57	4,77	180	175	110	6,5
ASLH400/5/500	5	16,58	7,65	180	180	115	7,5
ASLH400/5/625	6,25	13,26	9,56	180	180	120	8,5
ASLH400/5/750	7,5	11,05	11,47	180	180	120	9
ASLH400/5/1000	10	8,30	15,30	180	180	130	11
ASLH400/5/1250	12,5	6,63	19,12	180	180	145	13,5
ASLH400/5/1500	15	5,53	22,95	240	200	140	14,5

ASLH400/5/2000	20	4,15	30,60	240	200	160	20
ASLH400/5/2500	25	3,32	38,25	240	200	165	22
ASLH400/5/3000	30	2,76	45,90	300	260	160	25
ASLH400/5/4000	40	2,07	61,20	300	260	170	28
ASLH400/5/5000	50	1,66	76,50	300	260	180	40

* Özel İstek Üzerine üretim yapılmaktadır. Production can be made according to your request.